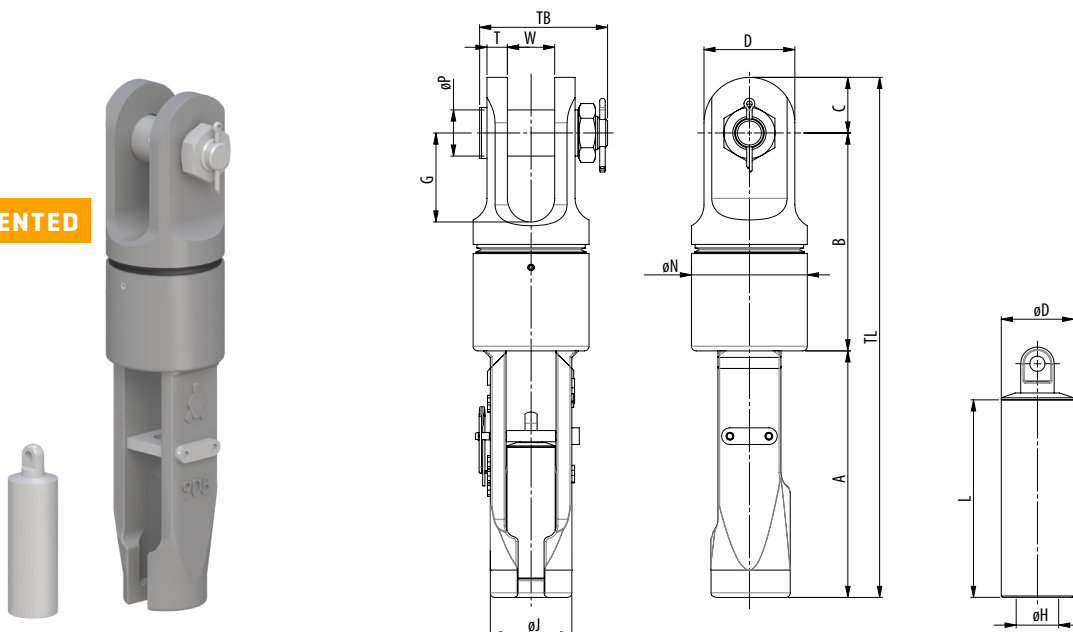


NEW!

SUPER REEVE CONNECTOR SWIVEL SOCKETS WITH BOLT AND NUT

**QUENCHED AND
TEMPERED CAST STEEL**

PATENTED


Model nr.	MBL (Mtons)	for wire ø		Dimensions (mm)																Weight (kg)
		(mm)	(inch)	A	B	C	ø H	ø P	T	W	G	D	øD	øJ	øN	L	TB	TL		
SCS-SW 902 B	25	13-16	½ - 5/8	182	157	32	19	30	14	32	60	58	32	56	76	98	96	371	7	
SCS-SW 903 B	40	16-19	5/8 - ¾	208	186	40	22	35	16	38	70	70	40	65	93	114	107	434	11	
SCS-SW 904 B	55	20-22	7/8	238	208	45	26	41	19	44	80	80	44	77	105	130	123	491	17	
SCS-SW 905 B	75	23-26	1	266	235	60	31	50	22	51	96	98	52	88	125	142	138	561	26	
SCS-SW 906 B	90	27-29	1⅛	290	262	65	34	57	25	57	107	108	58	96	135	159	160	617	34	
SCS-SW 907 B	125	30-32	1¼	327	292	73	36	63	28	63	118	120	64	110	150	177	165	692	49	

MBL = Minimum Breaking Load

- The standard finish of these sockets is hot dipped galvanized.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



**SEE OUR WARNING
& SAFETY INFORMATION**