


TURNBUCKLES WITH TRAPEZOID THREAD; JAW - JAW

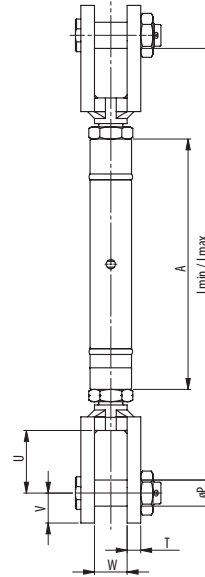

Model No.	WLL (UStons)	L min (inch)	L max (inch)	Take-up (inch)	Thread (trap.)	Dimensions (inch)						Weight (lbs)
						A	øP	U	V	W	T	
SPS TR.22.188.1,6J-J	1.7	15.67	22.24	6.57	22 x 5	9.45	0.79	2.17	0.89	0.91	0.43	7
SPS TR.24.200.2J-J	2.2	16.61	23.74	7.13	24 x 5	10.24	0.87	2.28	0.98	1.02	0.47	9
SPS TR.28.206.2,5J-J	2.7	20.16	28.62	8.46	28 x 5	11.02	0.94	2.87	1.08	1.18	0.47	13
SPS TR.30.228.3,1J-J	3.4	21.38	30.24	8.86	30 x 6	11.81	1.06	3.15	1.18	1.26	0.59	20
SPS TR.32.241.4J-J	4.4	22.99	32.13	9.13	32 x 6	12.60	1.18	3.39	1.28	1.38	0.59	22
SPS TR.36.240.5J-J	5.5	24.09	33.62	9.53	36 x 6	13.39	1.42	3.66	1.48	1.57	0.79	33
SPS TR.44.263.6,3J-J	6.9	27.60	38.23	10.63	44 x 7	14.96	1.54	4.25	1.67	1.77	0.79	44
SPS TR.48.297.8J-J	8.8	29.72	41.38	11.65	48 x 8	16.54	1.77	4.41	1.87	1.97	0.98	62
SPS TR.52.309.10J-J	11.0	31.42	43.46	12.05	52 x 8	18.11	1.89	4.53	2.17	2.36	0.98	77
SPS TR.55.340.12,6J-J	13.8	33.94	47.80	13.86	55 x 9	19.69	2.05	4.80	2.36	2.56	1.18	104
SPS TR.65.354.16J-J	17.6	37.17	51.57	14.41	65 x 10	21.26	2.36	5.12	2.56	2.76	1.18	137
SPS TR.70.382.20J-J	22.0	41.02	55.98	14.96	70 x 10	22.83	2.68	5.71	2.76	2.95	1.38	187
SPS TR.75.404.25J-J	27.5	44.33	60.16	15.83	75 x 10	24.41	2.83	6.30	2.95	3.15	1.38	220
SPS TR.80.430.31,5J-J	34.7	46.93	64.17	17.24	80 x 10	25.98	3.15	6.69	3.35	3.54	1.57	287
SPS TR.90.495.40J-J	44.0	50.39	68.66	18.27	90 x 10	27.36	3.54	7.48	3.62	3.94	1.77	386
SPS TR.100.550.50J-J	55.1	54.72	75.20	20.47	100 x 10	30.31	3.94	8.07	4.13	4.33	1.97	520
SPS TR.110.605.63J-J	69.4	60.08	82.28	22.20	110 x 10	33.66	4.33	8.66	4.41	4.72	2.36	717
SPS TR.120.660.80J-J	88.1	65.08	89.88	24.80	120 x 10	36.22	4.92	9.25	5.00	5.51	2.76	996
SPS TR.130.715.100J-J	110.2	68.82	97.17	28.35	130 x 10	39.17	5.51	9.84	5.59	6.14	2.76	1272
SPS TR.140.770.125J-J	137.7	74.80	104.41	29.61	140 x 10	42.13	6.30	10.63	6.38	6.93	3.15	1788
SPS TR.160.880.160J-J	176.3	82.28	116.93	34.65	160 x 10	48.03	7.09	11.42	7.17	7.87	3.54	2469

Minimum Ultimate Strength = 5 x WLL

- Standard painted blue, but can be supplied in any color or galvanized.
- Available in all combinations of eyes, stud eyes and welding ends.
- Factory supplied with lock nuts.
- Lock plates or special locking devices possible.
- Can be supplied with turning wheel or ratchet.
- Other sizes possible.
- Straight or in-line pull only.

