
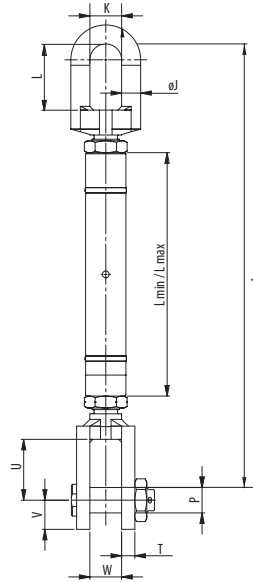


TURNBUCKLES WITH TRAPEZOID THREAD; JAW - OBLONG EYE



Model No.	WLL (UStons)	L min (inch)	L max (inch)	Take-up (inch)	Thread (trap.)	Dimensions (inch)								Weight (lbs)	
						A	J	K	L	øP	T	U	V		W
SPS TR.22.188.1,6J-O	1.7	16.42	22.99	6.57	22 x 5	9.45	0.63	1.02	2.28	0.79	2.17	0.89	0.91	23	7
SPS TR.24.200.2J-O	2.2	17.36	24.49	7.13	24 x 5	10.24	0.63	1.02	2.28	0.87	2.28	0.98	1.02	26	9
SPS TR.28.206.2,5J-O	2.7	20.59	29.06	8.46	28 x 5	11.02	0.79	1.26	2.83	0.94	2.87	1.08	1.18	30	13
SPS TR.30.228.3,1J-O	3.4	21.61	30.47	8.86	30 x 6	11.81	0.79	1.26	2.83	1.06	3.15	1.18	1.26	32	15
SPS TR.32.241.4J-O	4.4	23.90	33.03	9.13	32 x 6	12.60	0.98	1.57	3.70	1.18	3.39	1.28	1.38	35	20
SPS TR.36.240.5J-O	5.5	24.96	34.49	9.53	36 x 6	13.39	0.98	1.57	3.70	1.42	3.66	1.48	1.57	40	31
SPS TR.44.263.6,3J-O	6.9	28.50	39.13	10.63	44 x 7	14.96	1.18	1.77	4.25	1.54	4.25	1.67	1.77	45	44
SPS TR.48.297.8J-O	8.8	30.63	42.28	11.65	48 x 8	16.54	1.26	1.97	4.53	1.77	4.41	1.87	1.97	50	64
SPS TR.52.309.10J-O	11.0	32.76	44.80	12.05	52 x 8	18.11	1.42	2.36	4.92	1.89	4.53	2.17	2.36	60	66
SPS TR.55.340.12,6J-O	13.8	36.42	50.28	13.86	55 x 9	19.69	1.57	2.56	5.67	2.05	4.80	2.36	2.56	65	106
SPS TR.65.354.16J-O	17.6	39.65	54.06	14.41	65 x 10	21.26	1.77	2.76	6.42	2.36	5.12	2.56	2.76	70	121
SPS TR.70.382.20J-O	22.0	43.27	58.23	14.96	70 x 10	22.83	2.17	2.95	6.61	2.68	5.71	2.76	2.95	75	165
SPS TR.75.404.25J-O	27.5	46.34	62.17	15.83	75 x 10	24.41	2.36	3.15	7.56	2.83	6.30	2.95	3.15	80	207
SPS TR.80.430.31,5J-O	34.7	50.20	67.44	17.24	80 x 10	25.98	2.36	3.54	8.50	3.15	6.69	3.35	3.54	90	247

Minimum Ultimate Strength = 5 x WLL

- Standard painted blue, but can be supplied in any color or galvanized.
- Available in all combinations of eyes, stud eyes and welding ends.
- Factory supplied with lock nuts.
- Lock plates or special locking devices possible.
- Can be supplied with turning wheel or ratchet.
- Other sizes possible.
- Straight or in-line pull only.

