


## TURNBUCKLES WITH TRAPEZOID THREAD; JAW - STUD EYE

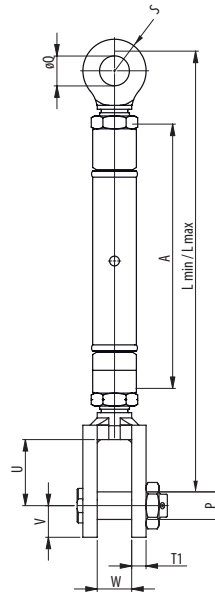

Model No.	WLL (UStons)	L min (inch)	L max (inch)	Take-up (inch)	Thread (trap.)	Dimensions (inch)									Weight (lbs)
						A	øP	øQ	S	T	T1	U	V	W	
SPS TR.22.188.1,6-J-E	1.7	14.45	21.02	6.57	22 x 5	9.45	0.79	0.91	0.89	0.79	2.17	0.87	0.91	23	4
SPS TR.24.200.2-J-E	2.2	15.55	22.68	7.13	24 x 5	10.24	0.87	0.98	0.98	0.87	2.28	0.98	1.02	26	7
SPS TR.28.206.2,5-J-E	2.7	18.07	26.54	8.46	28 x 5	11.02	0.94	1.06	1.08	0.98	2.87	1.06	1.18	30	11
SPS TR.30.228.3,1-J-E	3.4	19.65	28.50	8.86	30 x 6	11.81	1.06	1.18	1.18	1.10	3.15	1.18	1.26	32	15
SPS TR.32.241.4-J-E	4.4	20.83	29.96	9.13	32 x 6	12.60	1.18	1.30	1.28	1.18	3.39	1.26	1.38	35	18
SPS TR.36.240.5-J-E	5.5	22.60	32.13	9.53	36 x 6	13.39	1.42	1.54	1.48	1.38	3.66	1.46	1.57	40	26
SPS TR.44.263.6,3-J-E	6.9	25.20	35.83	10.63	44 x 7	14.96	1.54	1.65	1.67	1.57	4.25	1.65	1.77	45	35
SPS TR.48.297.8-J-E	8.8	27.80	39.45	11.65	48 x 8	16.54	1.77	1.89	1.87	1.77	4.41	1.85	1.97	50	49
SPS TR.52.309.10-J-E	11.0	29.76	41.81	12.05	52 x 8	18.11	1.89	2.05	2.17	1.97	4.53	2.17	2.36	60	64
SPS TR.55.340.12,6-J-E	13.8	31.97	45.83	13.86	55 x 9	19.69	2.05	2.20	2.36	2.17	4.80	2.36	2.56	65	97
SPS TR.65.354.16-J-E	17.6	35.51	49.92	14.41	65 x 10	21.26	2.36	2.56	2.56	2.36	5.12	2.56	2.76	70	112
SPS TR.70.382.20-J-E	22.0	37.68	52.64	14.96	70 x 10	22.83	2.68	2.91	2.76	2.56	5.71	2.76	2.95	75	163
SPS TR.75.404.25-J-E	27.5	41.30	57.13	15.83	75 x 10	24.41	2.83	3.07	2.95	2.76	6.30	2.95	3.15	80	179
SPS TR.80.430.31,5-J-E	34.7	43.90	61.14	17.24	80 x 10	25.98	3.15	3.39	3.35	3.15	6.69	3.35	3.54	90	229
SPS TR.90.495.40-J-E	44.0	48.43	66.69	18.27	90 x 10	27.36	3.54	3.78	3.74	3.54	7.48	3.62	3.94	100	344
SPS TR.100.550.50-J-E	55.1	52.56	73.03	20.47	100 x 10	30.31	3.94	4.17	4.13	3.94	8.07	4.13	4.33	110	441
SPS TR.110.605.63-J-E	69.4	57.60	79.80	22.20	110 x 10	33.66	4.33	4.57	4.53	4.33	8.66	4.41	4.72	120	639
SPS TR.120.660.80-J-E	88.1	62.76	87.56	24.80	120 x 10	36.22	4.92	5.16	5.31	4.92	9.25	5.00	5.51	140	772
SPS TR.130.715.100-J-E	110.2	67.01	95.35	28.35	130 x 10	39.17	5.51	5.75	5.83	5.51	9.84	5.59	6.14	156	970
SPS TR.140.770.125-J-E	137.7	72.36	101.97	29.61	140 x 10	42.13	6.30	6.61	6.61	6.30	10.63	6.38	6.93	176	1455
SPS TR.160.880.160-J-E	176.3	80.94	115.59	34.65	160 x 10	48.03	7.09	7.40	7.48	7.09	11.42	7.17	7.87	200	2039

Minimum Ultimate Strength = 5 x WLL

- Standard painted blue, but can be supplied in any color or galvanized.
- Available in all combinations of eyes, stud eyes and welding ends.
- Factory supplied with lock nuts.
- Lock plates or special locking devices possible.
- Can be supplied with turning wheel or ratchet.
- Other sizes possible.
- Straight or in-line pull only.



SEE OUR WARNING & SAFETY INFORMATION