


TURNBUCKLES WITH TRAPEZOID THREAD; OBLONG EYE - OBLONG EYE

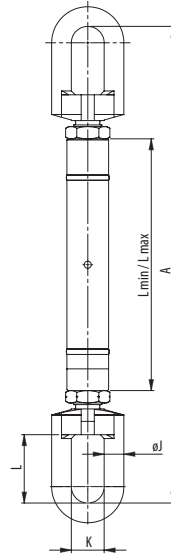

Model No.	WLL (UStons)	L min (inch)	L max (inch)	Take-up (inch)	Thread (trap.)	Dimensions (inch)				Weight (lbs)
						A	ø	K	L	
SPS TR.22.188.1,6.O-O	1.7	17.72	24.29	6.57	22 x 5	9.45	0.63	1.02	2.28	4
SPS TR.24.200.2.O-O	2.2	18.50	25.63	7.13	24 x 5	10.24	0.63	1.02	2.28	7
SPS TR.28.206.2,5.O-O	2.7	21.02	29.49	8.46	28 x 5	11.02	0.79	1.26	2.83	11
SPS TR.30.228.3,1.O-O	3.4	21.81	30.67	8.86	30 x 6	11.81	0.79	1.26	2.83	13
SPS TR.32.241.4.O-O	4.4	24.80	33.94	9.13	32 x 6	12.60	0.98	1.57	3.70	18
SPS TR.36.240.5.O-O	5.5	25.91	35.43	9.53	36 x 6	13.39	0.98	1.57	3.70	29
SPS TR.44.263.6,3.O-O	6.9	29.65	40.28	10.63	44 x 7	14.96	1.18	1.77	4.25	42
SPS TR.48.297.8.O-O	8.8	32.01	43.66	11.65	48 x 8	16.54	1.26	1.97	4.53	60
SPS TR.52.309.10.O-O	11.0	34.09	46.14	12.05	52 x 8	18.11	1.42	2.36	4.92	55
SPS TR.55.340.12,6.O-O	13.8	38.90	52.76	13.86	55 x 9	19.69	1.57	2.56	5.67	101
SPS TR.65.354.16.O-O	17.6	42.13	56.54	14.41	65 x 10	21.26	1.77	2.76	6.42	106
SPS TR.70.382.20.O-O	22.0	45.51	60.47	14.96	70 x 10	22.83	2.17	2.95	6.61	143
SPS TR.75.404.25.O-O	27.5	50.00	65.83	15.83	75 x 10	24.41	2.36	3.15	7.56	198
SPS TR.80.430.31,5.O-O	34.7	53.46	70.71	17.24	80 x 10	25.98	2.36	3.54	8.50	207

Minimum Ultimate Strength = 5 x WLL

- Standard painted blue, but can be supplied in any color or galvanized.
- Available in all combinations of eyes, stud eyes and welding ends.
- Factory supplied with lock nuts.
- Lock plates or special locking devices possible.
- Can be supplied with turning wheel or ratchet.
- Other sizes possible.
- Straight or in-line pull only.



SEE OUR WARNING & SAFETY INFORMATION