


TURNBUCKLES WITH TRAPEZOID THREAD; OBLONG EYE - STUD EYE

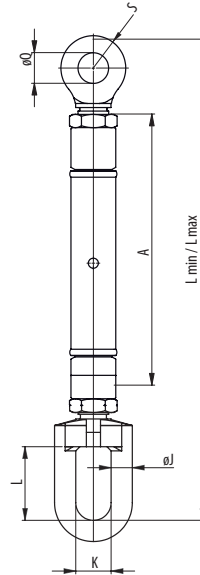

Model No.	WLL (UStons)	L min (inch)	L max (inch)	Take-up (inch)	Thread (trap.)	Dimensions (inch)							Weight (lbs)
						A	øJ	K	L	øQ	S	T	
SPS TR.22.188.1,6.O-E	1.7	15.75	22.32	6.57	22 x 5	9.45	0.63	1.02	2.28	0.91	0.89	0.79	4
SPS TR.24.200.2.O-E	2.2	16.69	23.82	7.13	24 x 5	10.24	0.63	1.02	2.28	0.98	0.98	0.87	7
SPS TR.28.206.2,5.O-E	2.7	18.70	27.17	8.46	28 x 5	11.02	0.79	1.26	2.83	1.06	1.08	0.98	11
SPS TR.30.228.3,1.O-E	3.4	19.88	28.74	8.86	30 x 6	11.81	0.79	1.26	2.83	1.18	1.18	1.10	13
SPS TR.32.241.4.O-E	4.4	21.73	30.87	9.13	32 x 6	12.60	0.98	1.57	3.70	1.30	1.28	1.18	15
SPS TR.36.240.5.O-E	5.5	23.03	32.56	9.53	36 x 6	13.39	0.98	1.57	3.70	1.54	1.48	1.38	26
SPS TR.44.263.6,3.O-E	6.9	26.18	36.81	10.63	44 x 7	14.96	1.18	1.77	4.25	1.65	1.67	1.57	37
SPS TR.48.297.8.O-E	8.8	28.50	40.16	11.65	48 x 8	16.54	1.26	1.97	4.53	1.89	1.87	1.77	55
SPS TR.52.309.10.O-E	11.0	31.10	43.15	12.05	52 x 8	18.11	1.42	2.36	4.92	2.05	2.17	1.97	53
SPS TR.55.340.12,6.O-E	13.8	34.45	48.31	13.86	55 x 9	19.69	1.57	2.56	5.67	2.20	2.36	2.17	93
SPS TR.65.354.16.O-E	17.6	37.99	52.40	14.41	65 x 10	21.26	1.77	2.76	6.42	2.56	2.56	2.36	97
SPS TR.70.382.20.O-E	22.0	41.10	56.06	14.96	70 x 10	22.83	2.17	2.95	6.61	2.91	2.76	2.56	157
SPS TR.75.404.25.O-E	27.5	44.06	59.88	15.83	75 x 10	24.41	2.36	3.15	7.56	3.07	2.95	2.76	181
SPS TR.80.430.31,5.O-E	34.7	47.17	64.41	17.24	80 x 10	25.98	2.36	3.54	8.50	3.39	3.35	3.15	190

Minimum Ultimate Strength = 5 x WLL

- Standard painted blue, but can be supplied in any color or galvanized.
- Available in all combinations of eyes, stud eyes and welding ends.
- Factory supplied with lock nuts.
- Lock plates or special locking devices possible.
- Can be supplied with turning wheel or ratchet.
- Other sizes possible.
- Straight or in-line pull only.



SEE OUR WARNING &
SAFETY INFORMATION