©2021-01

NEW!

SUPER REEVE CONNECTOR SWIVEL SOCKETS WITH PIN

QUENCHED AND TEMPERED CAST STEEL

PATENTED

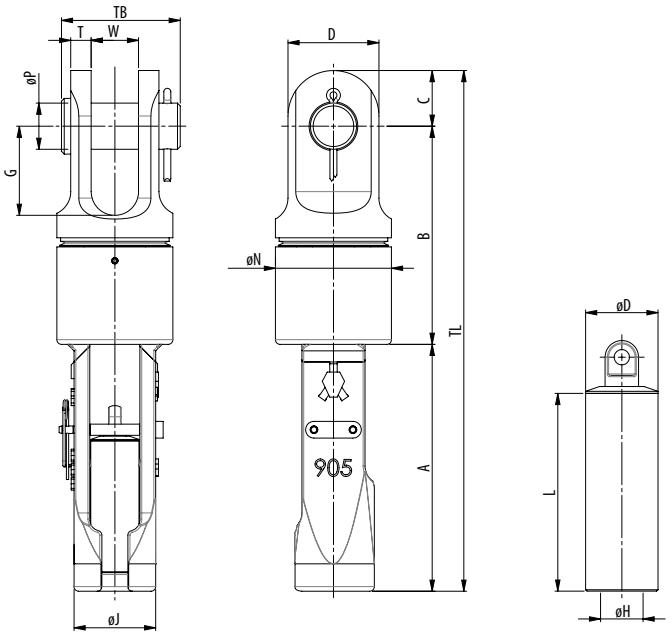

Model nr.	MBL (Mtons)	for wire ø		Dimensions (mm)															Weight (kg)
		(mm)	(inch)	A	B	C	ø H	ø P	T	W	G	D	øD	øJ	øN	L	TB	TL	
SCS-SW 902 P	25	13-16	½ - ⅝	182	157	32	19	30	14	32	60	58	32	56	76	98	85	371	7
SCS-SW 903 P	40	16-19	⅝ - ¾	208	186	40	22	35	16	38	70	70	40	65	93	114	95	434	11
SCS-SW 904 P	55	20-22	⅞	238	208	45	26	41	19	44	80	80	44	77	105	130	110	491	17
SCS-SW 905 P	75	23-26	1	266	235	60	31	50	22	51	96	98	52	88	125	142	128	561	26
SCS-SW 906 P	90	27-29	1⅛	290	262	65	34	57	25	57	107	108	58	96	135	159	142	617	34
SCS-SW 907 P	125	30-32	1¼	327	292	73	36	63	28	63	118	120	64	110	150	177	155	692	49

MBL = Minimum Breaking Load

- The standard finish of these sockets is hot dipped galvanized.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.

WARNING SEE OUR WARNING & SAFETY INFORMATION